



42. MEĐUNARODNI KONGRES O GREJANJU, HLAĐENJU I KLIMATIZACIJI
42nd INTERNATIONAL CONGRESS ON HEATING, REFRIGERATING AND AIR - CONDITIONING
30. XI - 2. XII 2011. Beograd, Srbija

MAYEKAWA

MAYEKAWA Europe nv/sa

Presented by Jan Boone, MAYEKAWA

LINE-UP NATURAL 5

"Natural Five" Refrigerants and Product Solutions

Refrigerant (Natural Five)	NH ₃ R-717	CO ₂ R-744	HC Hydrocarbon	H ₂ O R-718	Air R-728
90°C		Utility hot water			
60°C	Utility hot water	Utility hot water	Utility hot water	Heat recovery	
10°C	Chilled water Ice making	Chilled water Ice making	Heating HVAC	Chiller	
-15°C	Cold storage, Freezer, Fish boat				
-25°C	Specific Refrigeration needs				
-40°C	Freezer, Freeze-dry, Super Low temp storage				
-50°C			Cryogenics		Cryogenics
-60°C					
-100°C					
Notes	<ul style="list-style-type: none"> •Conventional system 	<ul style="list-style-type: none"> •Eco-Cute 	<ul style="list-style-type: none"> •Nat'l Proj. •Butane + Propane 	<ul style="list-style-type: none"> •Nat'l Proj. •Adsorption •Heat recovery 	<ul style="list-style-type: none"> •Nat'l Proj. •Air-cycle

Air Cycle Refrigeration Packaged Unit

2003 Developed at [Technical Strategy for Rationalization of Energy Consumption Project]
~2005 NEDO



**ULTIMATE NATURAL REFRIGERANT
'AIR'
FOR ULTRA LOW TEMPERATURE
REFRIGERATION**

Mayekawa Mfg.Co,Ltd
A.Machida

MAYEKAWA


MAYEKAWA Europe nv/sa

DOC.2011-304 R3

PRINCIPLES OF AIR REFRIGERATION SYSTEMS

AIR = most natural refrigerant
 ODP, GWP, TOXICITY, FLAMMABILITY = 0
 Air cycle = transcritical as $T_{critical} (-140.7^{\circ} C)$,
 uses only gas without phase transition.
 Principle : cooling down of compressed air
 before expanding resulting in
 low temperatures in range of -50 to $-100^{\circ} C$.


PROCESS CYCLE :
 Adiabatic compression ->
 Heat dissipation
 &
 Adiabatic expansion ->
 Heat absorption
 conducted in GAS phase.

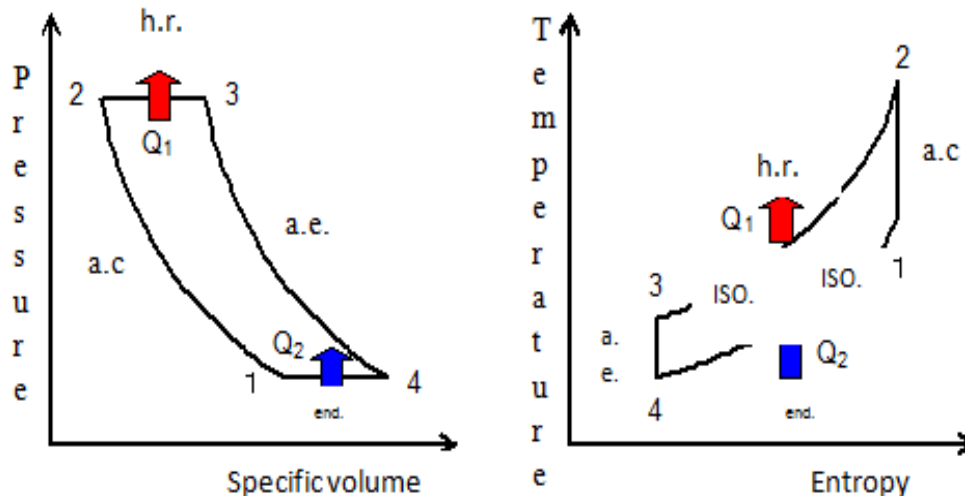

with constant pressure
 change,
 without condensation or
 evaporation

simple system, equipment:
 COMPRESSOR +
 HEAT EXCHANGERS +
 EXPANDER

INTRODUCTION 'PASCAL AIR'

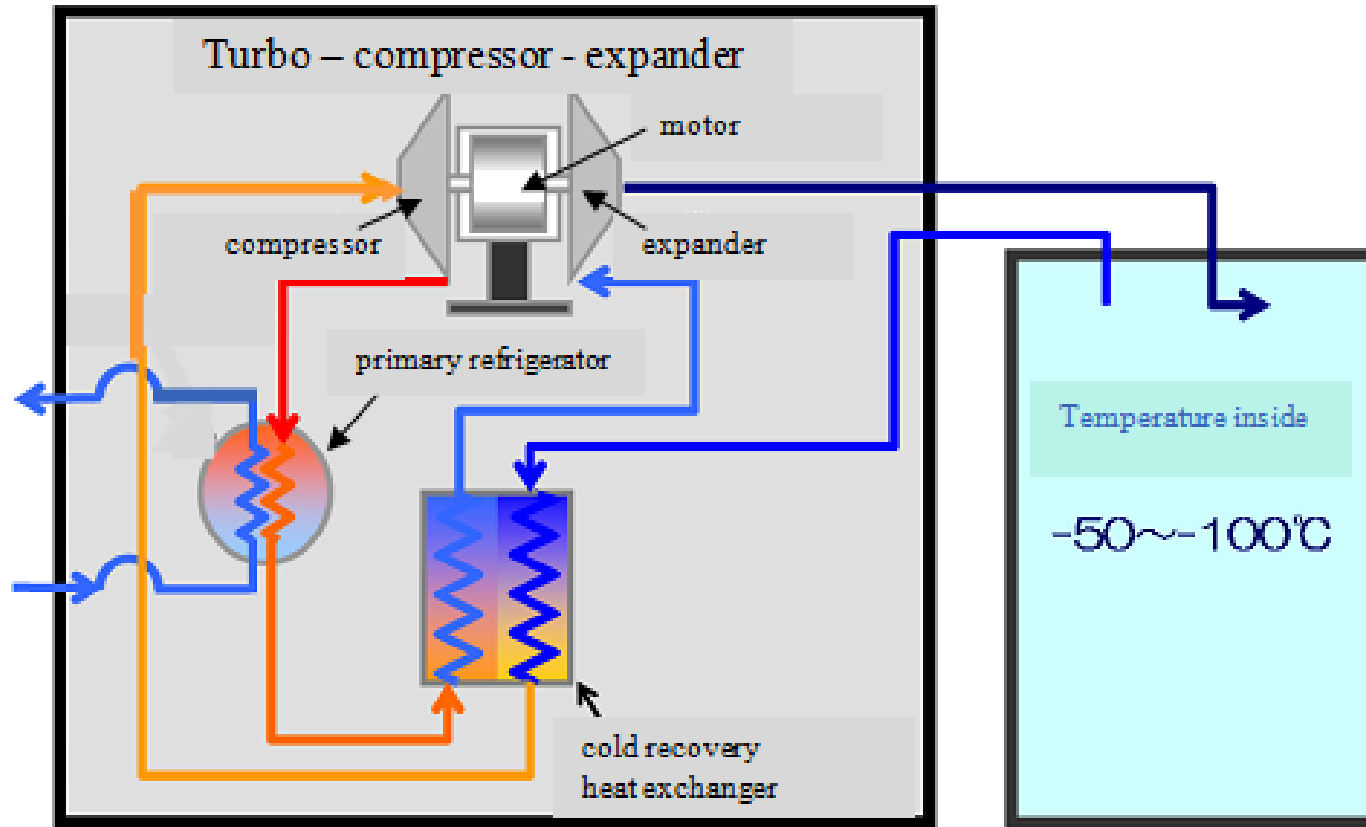

Air – refrigeration system "Pascal Air"

Low temperature system

OUTER VIEW AIR REFRIGERATION SYSTEM



Size:
W3100
L4600
H3100
mm
TRANSPORTABLE

STANDARD SPECIFICATIONS

REFRIGERANT	AIR	
REFRIGERATION CAPACITY	30	kW
COMPRESSOR POWER	60	kW
TEMPERATURE (refrigerator blow-out)	-60 / -80	°C
MWP	0.2	MPa

Open cycle directly using the air with MWP of 0.2 Mpa.
HP safety regulation n.a.

Air ducts can easily be extended or re-routed when facility re-arrangement is needed.

Refrigerant filling &/recovery n.a.


Large-scale construction n.a.

Operating costs reduced.

Maintenance reduced.

STANDARD SPECIFICATIONS

Appearance of turbo-type expander-integrated compressor

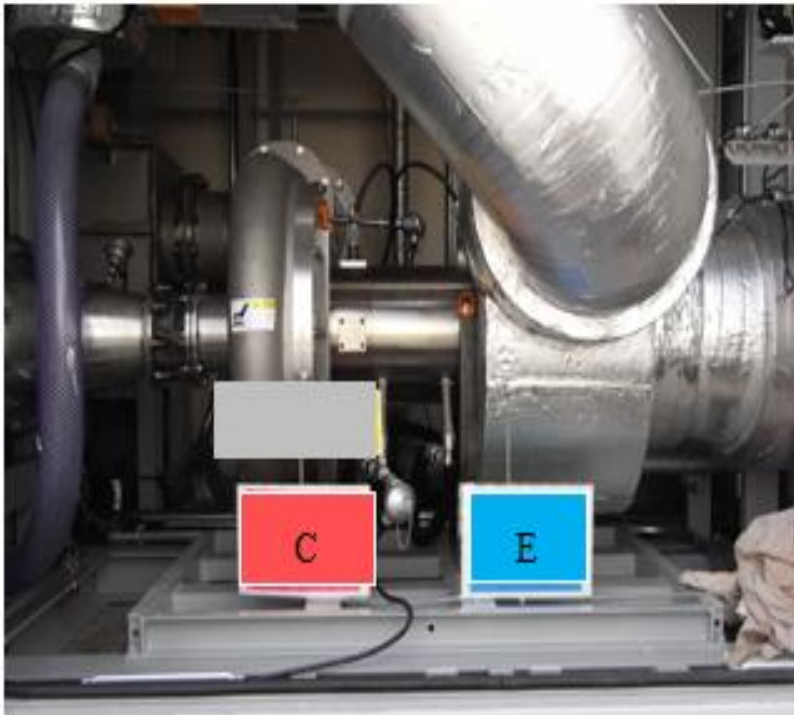

Compressor : turbotype

Expander : adiabatic expansion
generates 1/3rd of power
needed for compression

Motor : built-in in center
in coaxial structure

FIELD CASE

Plant :
Yaizu City, Shizuoka Prefecture, Japan
Tuna & bonito fish storage
Nominal capacity 1795tons -50° C

System circulates ultra low temperature air as refrigerant (-80° C)

Installation date	December 2008	Unit
refrigerator temperature	-60	°C
total capacity	150	kW
nr of machines per room	3	
nr of rooms	2	

INSTALLATION OF PASCAL AIR




CONVENTIONAL ULTRA-LOW TEMPERATURE REFRIGERATOR



'PASCAL -AIR' ULTRA-LOW TEMPERATURE REFRIGERATOR



PLANT FLOW DIAGRAM

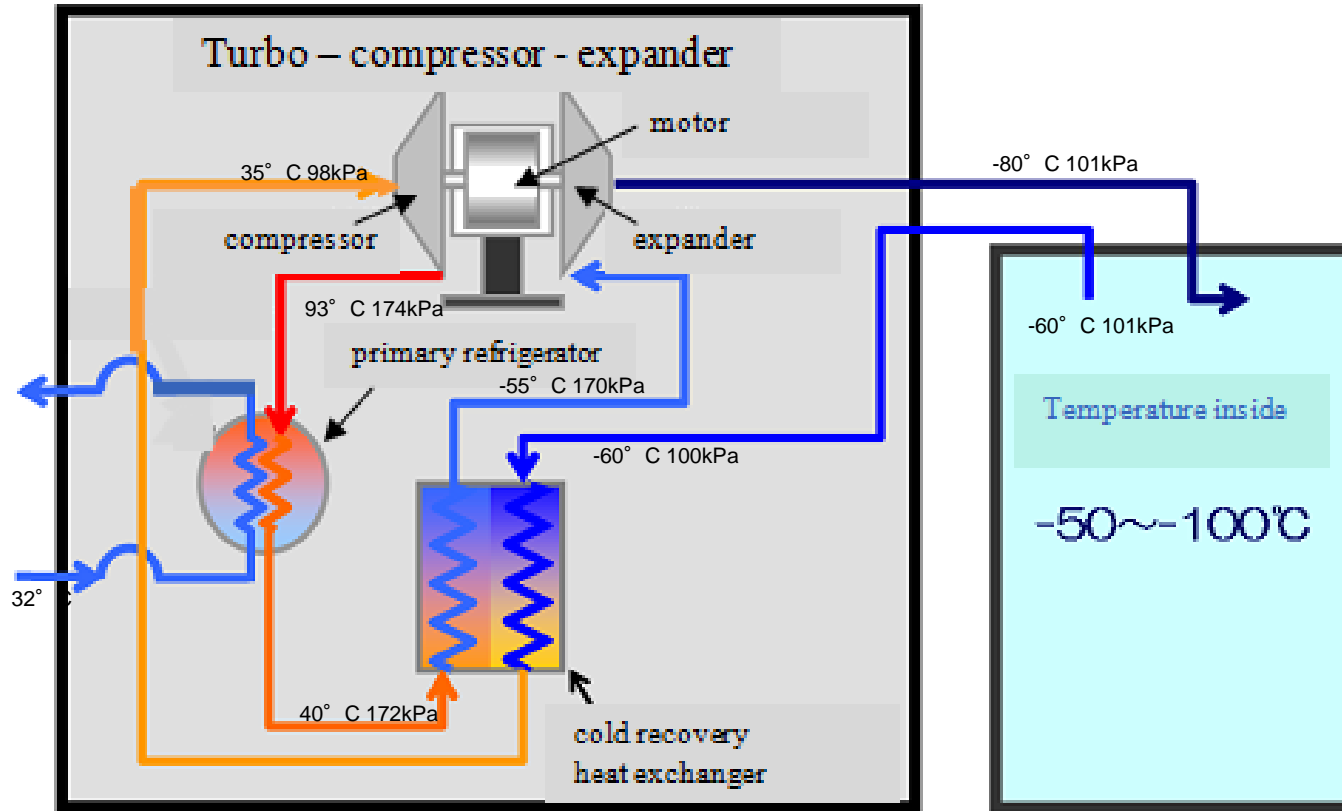

Air – refrigeration system “Pascal Air”

Low temperature system

PLANT OPERATING CONDITIONS


	nr 1	6667	hours
operating	nr 2	5996	hours
hours per	nr 3	6069	hours
8/4/2011	nr 4	6597	hours
	nr 5	6173	hours
	nr 6	7410	hours
performance data per unit			
	suction pressure (35°C)	0,98	bara
	discharge pressure (93°C)	1,74	bara
	rotation speed (invertor)	12.000 - 18.000	rpm
	capacity	30	kW
	power consumption	72	kW
	air outlet temperature	-80	°C
	refrigerator air temperature	-60	°C
	gain expander	40	kW

PLANT ENERGY CONSUMPTION

TOTAL YEARLY POWER CONSUMPTION (kWh)

R23/R22 CASCADE SYSTEM			PASCAL AIR SYSTEM		
OPERATING REGIME			OPERATING REGIME		
DAY	NIGHT	TOTAL	DAY	NIGHT	TOTAL
1880000	1490000	3370000	674000	1581000	2255000
			REDUCTION		
			-64,1	6,1	-33,1

ENERGY SAVINGS

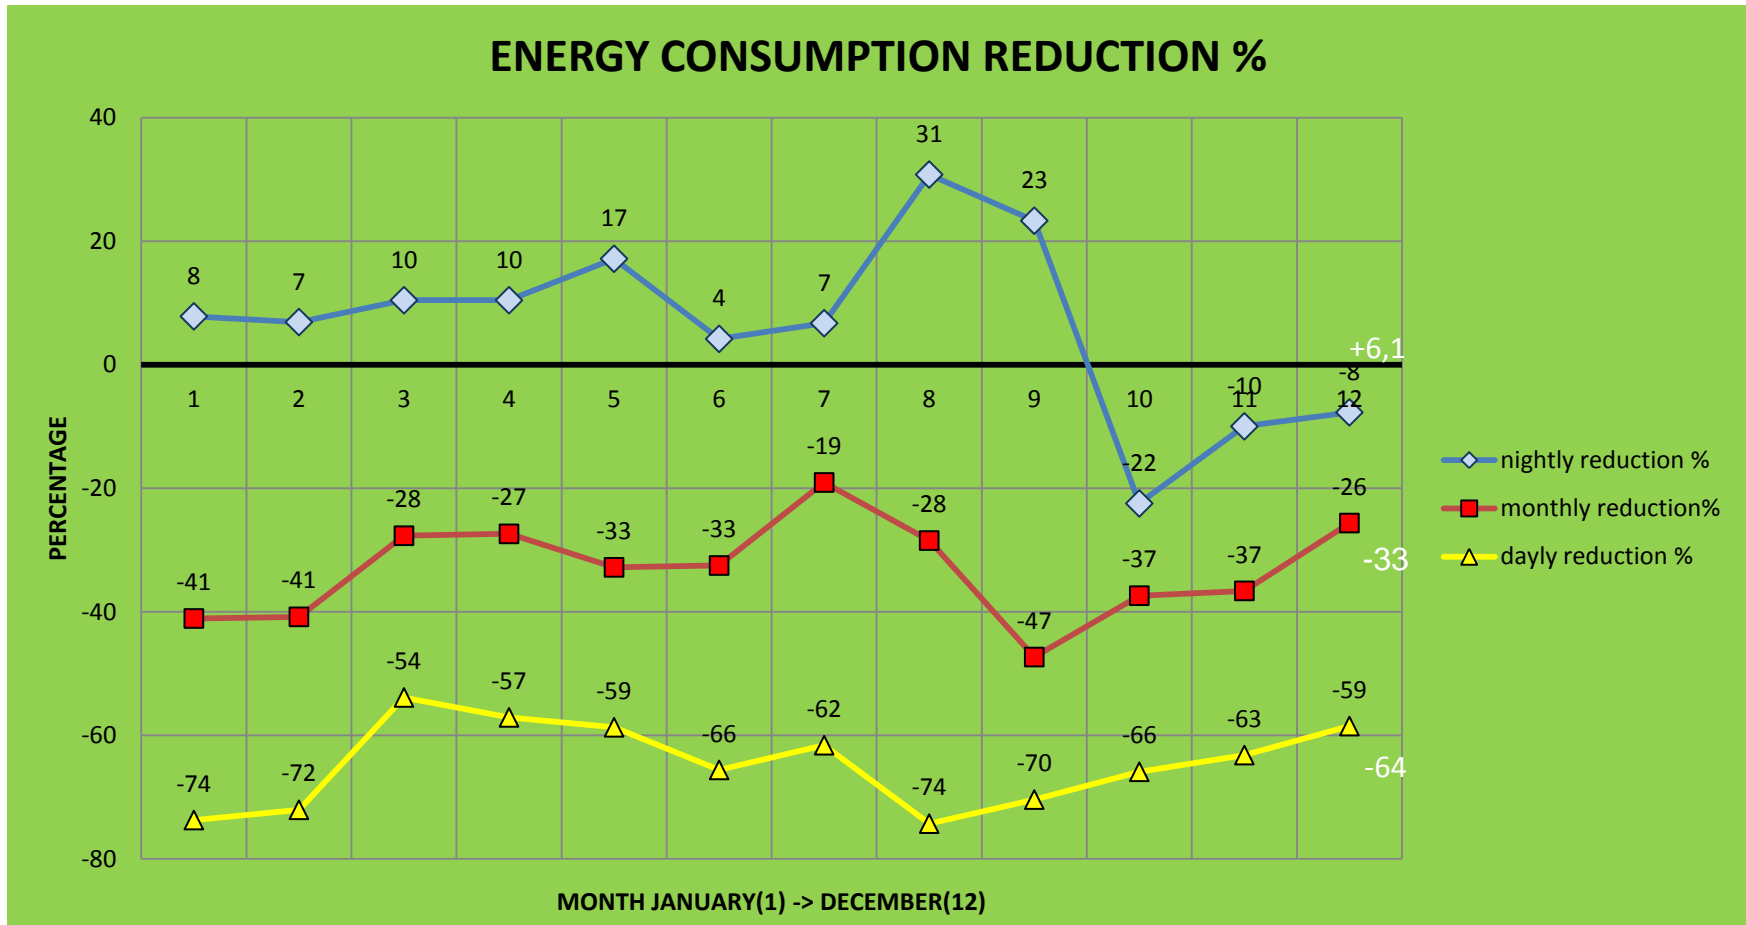

**20° C temperature difference :
Blow-in air <> Low temperature system**

**Reduces the air circulation to 1/10th
compared to conventional cooling(2-3° C)**

**Result :
Cooled products are not dried out
Quality is preserved
Load on workers is reduced**

**COPwise 'PASCAL AIR'
advantage<>conventional system**

**application-field : ultra low t° <-50° C
'blanc area for conventional systems'
Apart category <> conventional systems!**

**Product developed by use of research
results with NEDO in 2003-2005**

(New Energy & Industrial Development Organisation)

TO-DAY APPROX. 10 UNITS OPERATIONAL

“PASCAL AIR” MARKETS

MARKETS	APPLICATION
INDUSTRIAL REFRIGERATION	Fish (tuna & bonito freezing) Freeze drying Ice cream
MARINE/FISH INDUSTRY	Food
PHARMACEUTICAL/ MEDICAL	Medical producing process Storage blood samples Organ cooling reacting process
FINE CHEMICAL	Manufacturing process for electronic material
PETROCHEMICAL	Process gas cooling Condensation Distillation Extraction
SEMICONDUCTOR	Condensation process of detergent
WASTE DISPOSAL	Recycling Crushing Rubber and plastics

THANKS FOR YOUR
ATTENTION!

Presented by Jan Boone, MAYEKAWA

MARKET AVAILABILITY

MAYEKAWA REPRESENTATIVE FOR SERBIA :

“KLIMA” doo Smederevo – Serbia

telephone : ++381 26 / 222 109

website : www.klima.co.rs

MAYEKAWA

MAYEKAWA Europe nv/sa

DOC.2011-304 R3

MAYEKAWA MYCOM

WORLDWIDE

- 33 countries / 119 offices
- 8 production plants



MAYEKAWA Europe Organization



SWITZERLAND

Rosenbergstrasse 31,
CH - 6300, Zug
Tel. +41 41 726 8626
Fax +41 41 726 8620
<http://www.mayekawa.ch/>
E-mail info@mayekawa.ch

SPAIN

Calle Montevideo 5,
Nave 13 POL.
Industrial Campopomosó
28506 Alcala de Henares, Madrid
Tel. +34 91 830 0392
Fax +34 91 830 0397
<http://www.mayekawa.es/>
E-mail mayekawa@mayekawa.es

RUSSIA

House 3, Flat 54, Mytnaya
St. Moscow, 119045
Tel. +7 499 230 01 76
Fax +7 499 230 21 12
<http://www.mayekawa.ru/>
E-mail info@mayekawa.ru

GERMANY

Gabriele-Münter Strasse 3,
82110 Germering
Tel. +49 89 5527 969 0
Fax +49 89 5527 969 19
E-mail info@mayekawa.de

FRANCE

9, Rue Michael Faraday,
75150 Montigny-Le-Cretonneux,
Tel. +33 1 30 58 2600
Fax +33 1 30 58 1937
<http://www.mayekawa.fr/>
E-mail mycom-france@mayekawa.eu

UNITED KINGDOM

16 Oakhurst Gardens,
Bexleyheath, Kent DA7 5JP
Tel. +44 1322 433556
Fax +44 1322 433164

BULGARIA

94, Hristo Botev Str.1202 Sofia
Tel. +359 2 8910130
Fax +359 2 8910131

DUBAI

P.O.Box.61349, LOB. 11, No.126,
Jebel Ali Free Zone, Dubai, U.A.E
Tel. +971 4 867 2232
Fax +971 4 867 2238

INDIA

1st Floor, Balaji House,
Nr. Mansarovar Heights,
Mumbai-Puna Road, Pimpri,
Pune-411 018
Maharashtra, India
Tel. +91 20 2748 4537
Fax +91 20 2748 4539

AUSTRALIA

Unit 2,44 McCauley
Street Matraville NSW 2036 Australia
Tel. +61 2 9695 7000
Fax +61 2 9695 7001
E-mail mycomaus@mayekawa.com.au

NEW ZEALAND

20 Tui Street Otahuhu P.O. Box 12108
Auckland New Zealand
Tel. +64 9 276 2305
Fax +64 9 276 2306
E-mail mycom@ihug.co.nz

JAPAN HEAD OFFICE

3-14-15 Botan Koto-KU,
Tokyo 135-8482, JAPAN
Tel. (81)-3-3642-6161
Fax (81)-3-3643-7094
E-mail e-public@mayekawa.co.jp

MAYEKAWA Europe nv/sa

Leuvensesteenweg 505
1930 Zaventem - Belgium
Tel. +32 2 757 90 75
Fax +32 2 757 90 23
URL <http://www.mayekawa.eu>
E-mail info@mayekawa.eu

Global web site
<http://www.mayekawa.com/>