MYCOM

MAYEKAWA

Presented by Jan Boone, MAYEKAWA

ATMO faster to Europe
EU sphere natural refrigerants

MYCOM

MARKET TREND

MAYEKAWA

ATMO faster to Europe
EU sphere natural refrigerants

MYCOM

NATURAL REFRIGERANT	APPLICATION	TYPE	COOLING/HEATING OUTPUT				QUANTITIES	NOTES
			RANGE		TEMPERATURE		TREND	
			kW	kW	°C	°C	%	
NH3	COMPRESSION HEAT PUMP	PISTON	200	600	50	80	25	
		SCREW	500	2000	50	80	150	
CO2	COMPRESSION SUBCRITICAL	PISTON		1000	-52	-30	150	
		SCREW		3000	-52	-30	150	
	COMPRESSION TRANSCRITICAL HEAT PUMP	PISTON		90	90	100		ECO-CUTE (P&K) (MJ : 300 pcs)
	PUMP SECONDARY BRINE	SCREW		90 800		-30 -30	10	NEWTON3000 (P&K) (MJ : 350 pcs)
HC	COMPRESSION SUBCRITICAL	PISTON SCREW		2000	-40	-20	10	process/chemical
WATER	ADSORPTION DESORPTION	ADREF	100	300	15	20		ADREF (P&K) (MJ : +50pcs)
AIR	COMPRESSION TRANSCRITICAL	TURBINE		30	-120	-80		PASCAL AIR (MJ : 10 pcs)

ATMO faster to Europe
EU sphere natural refrigerants

MYCOM

FIELD CASES :

NATURAL REFRIGERANTS
In Different Industrial
HEAT PUMP plants in Norway

MAYEKAWA

MAYEKAWA Europe nv/sa

ATMO EU sphere
Solutions for Europe
natural refrigerants

MYCOM

FIELD CASE

TECHNOLOGY AREA – ENERGY STATION – COOLING & HEATING

MYCOM

INTRODUCTION

Starting point, need?	**The contractor THERMA INDUSTRI has received the request from his customer to install 2 hot water heat pumps, each 1350kW for 77°C.**
Heat output ? **2700 kW** **77°C**	**The plant is an energy station of a technology area.** **The cooling is used to produce ice-water for :** **Office cooling** **Cooling for data center** **The heating is used to produce hot water of maximum 82°C for :** **District heating**
Heat Source ? **30°C to 40°C**	**Requirements ?** **Heat source :** **1) Heat rejection from the cooling plant needed for office- and process cooling** **Minimum load : 600 kW** **Maximum load : 5000 kW** **2) Sewage water in case insufficient cooling plant heat rejection available.**
Restrictions ?	

->INTRODUCTION

Why natural refrigerants +80°C	For the temperature of 80°C NH_3 is the most suitable refrigerant
Which choice & why	NH_3 (TC=+80°C & PD=39,6barg) as natural refrigerant to obtain 77°C hot water. 50bar compressor available NH_3 is standard application for Therma Industri.
Timeframe	The project started in 2008. Installation done in 2009.

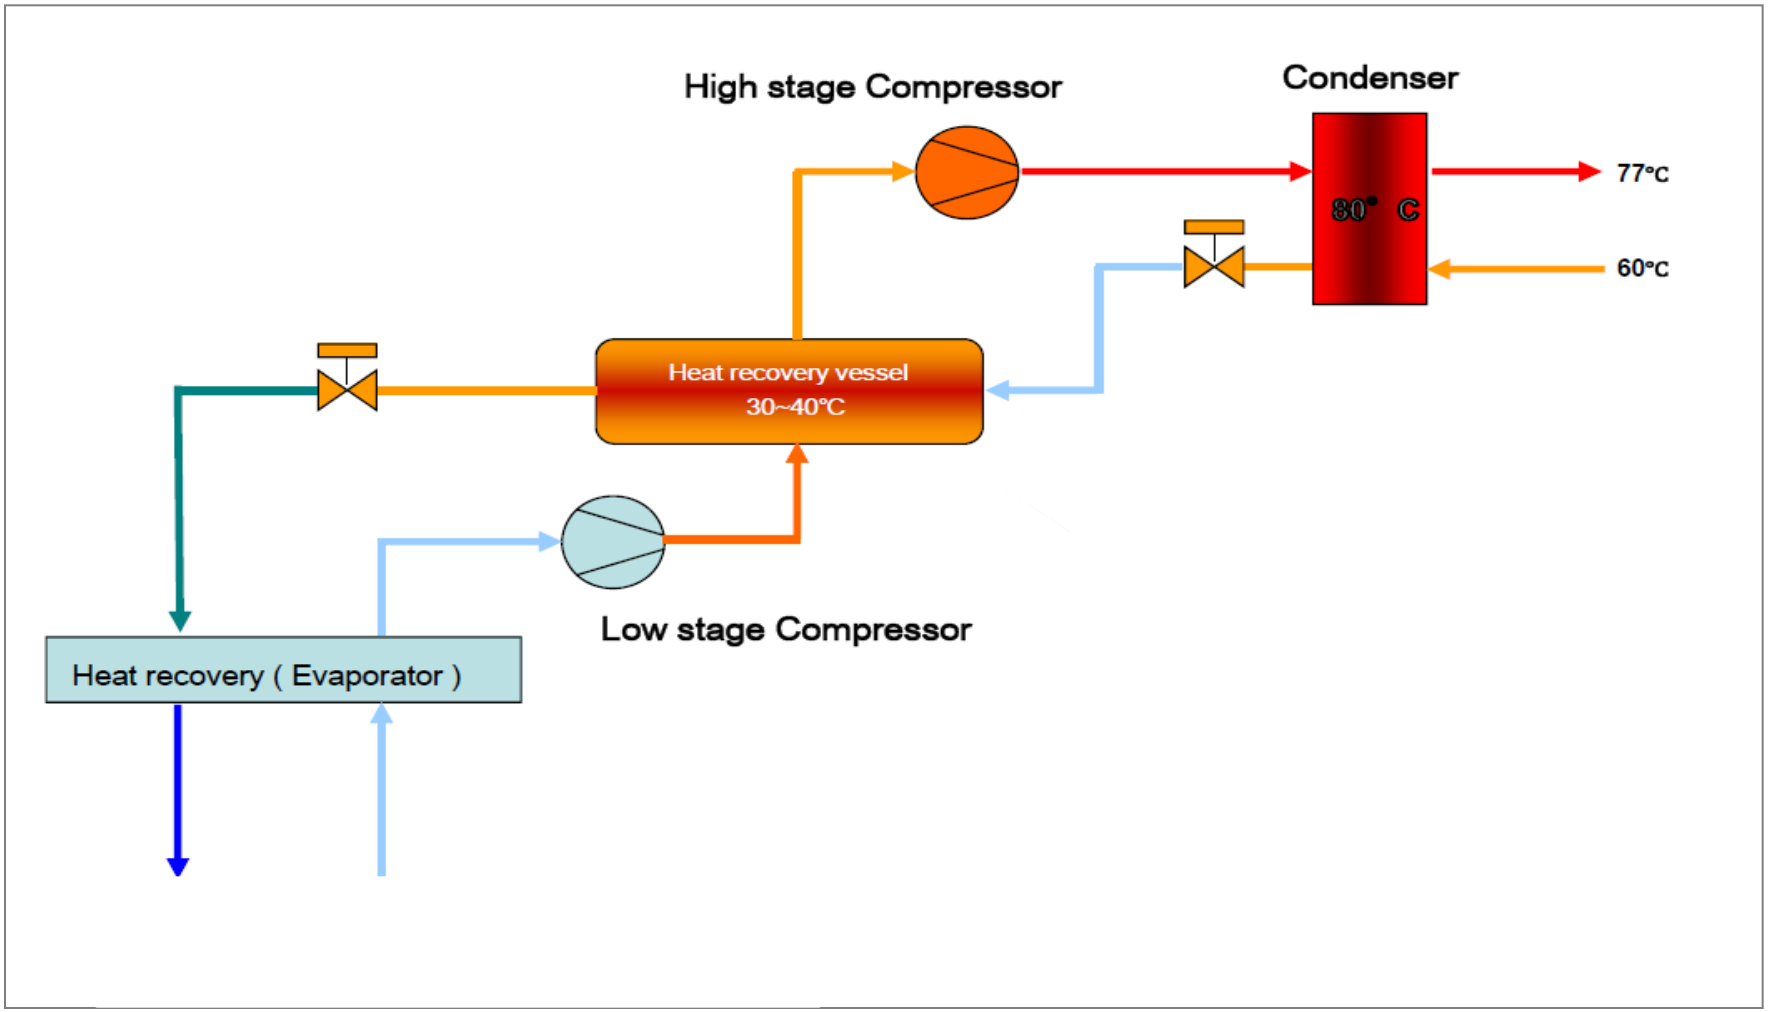
High stage Compressor
Condenser
77°C
80° C
60°C
Heat recovery vessel
30~40°C
Low stage Compressor
Heat recovery (Evaporator)


ATTENTION
31 4:18PM

MYCOM

IDENTIFICATION		
COMPRESSOR MODEL	SERIAL NUMBER	UNIT
N160GHS-V	8161006	VP1
N160GHS-V	8161005	VP2
MAIN DRIVE MOTOR	315kW	
QUANTITY	2	

PER MACHINE		HEAT INPUT	POWER INPUT	HEAT OUTPUT	
T	°C	30		77	
	kW	RT	BKW	QC	COP-h
RPM	3550	820	266	1086	4,1
	1800	361	136	497	3,7
T	°C	40		77	
	kW	RT	BKW	QC	COP-h
RPM	3550	1103	263	1366	5,2
	1800	471	134	605	4,5

T	°C	temperature	(heat input : NH3, heat output : hot water)
RT	kW	heat source capacity	
BKW	kW	absorbed motor power at shaft	
QC	kW	heat output capcity	
COP-h		coefficient of heating performance	
RPM	rpm	shaft revolution per minute	

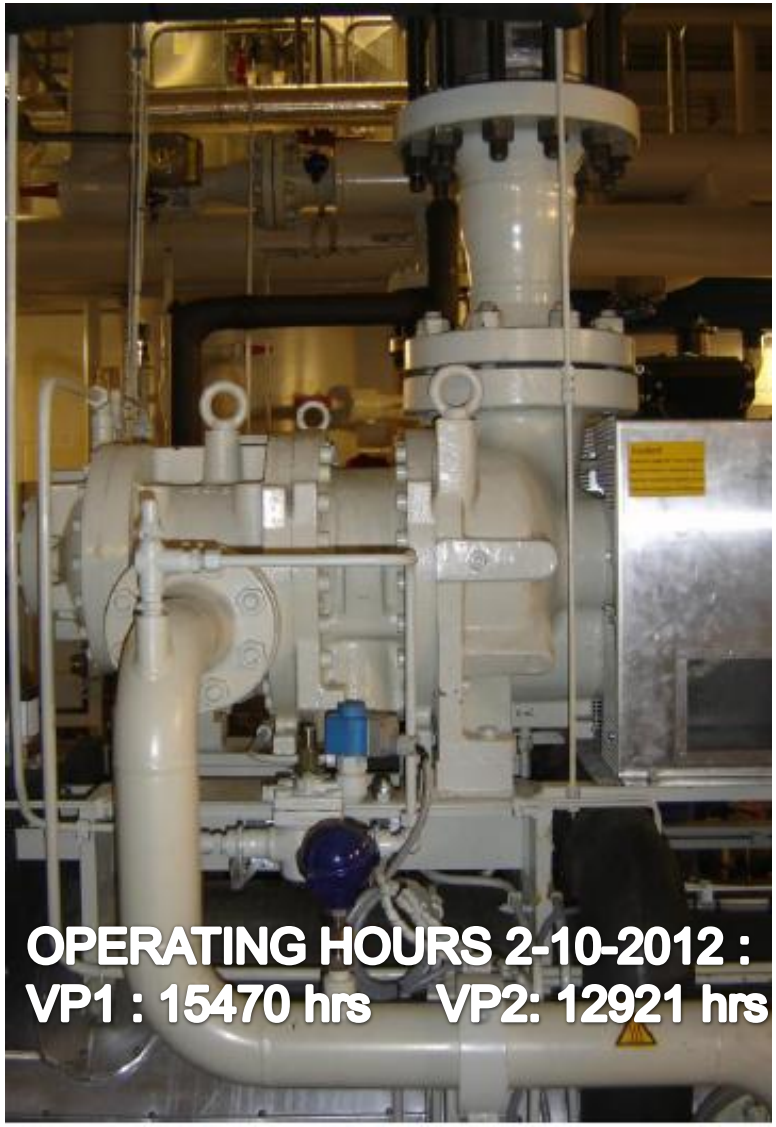

MAYEKAWA

MAYEKAWA Europe nv/sa

ATMO EU sphere
Solutions for Europe
natural refrigerants

LOGGING DATA

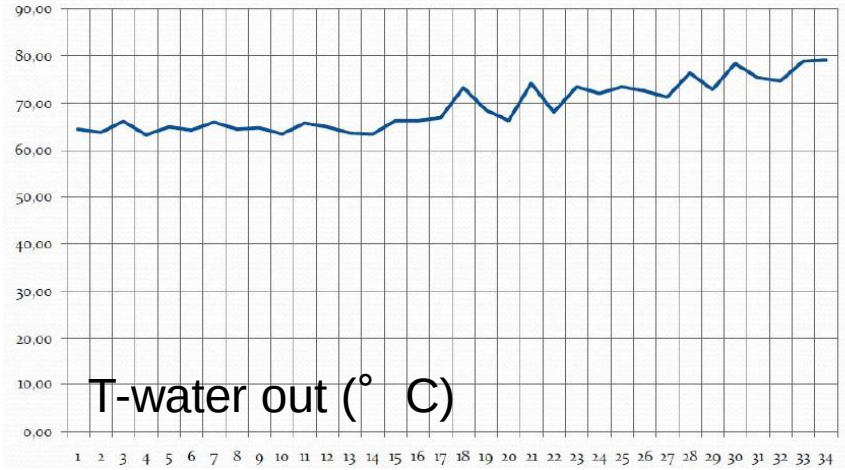

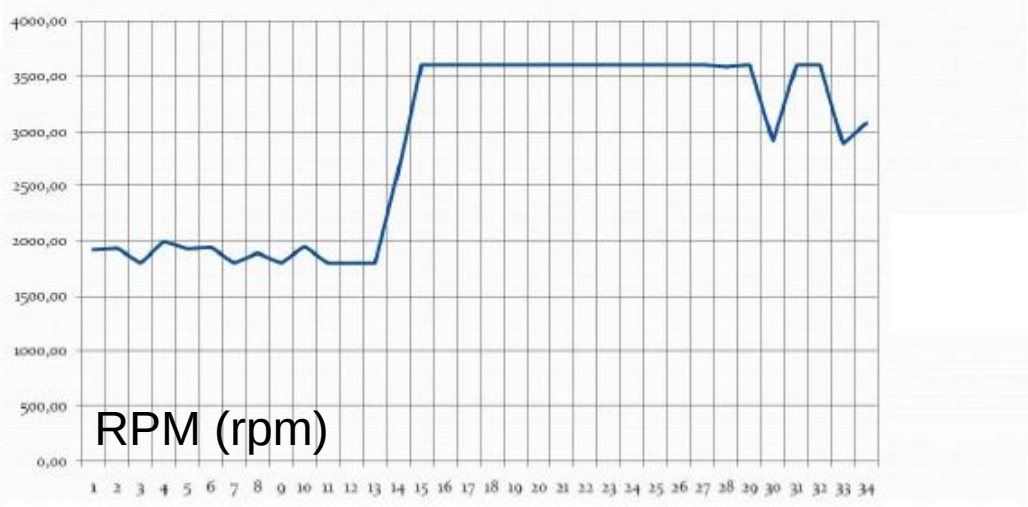

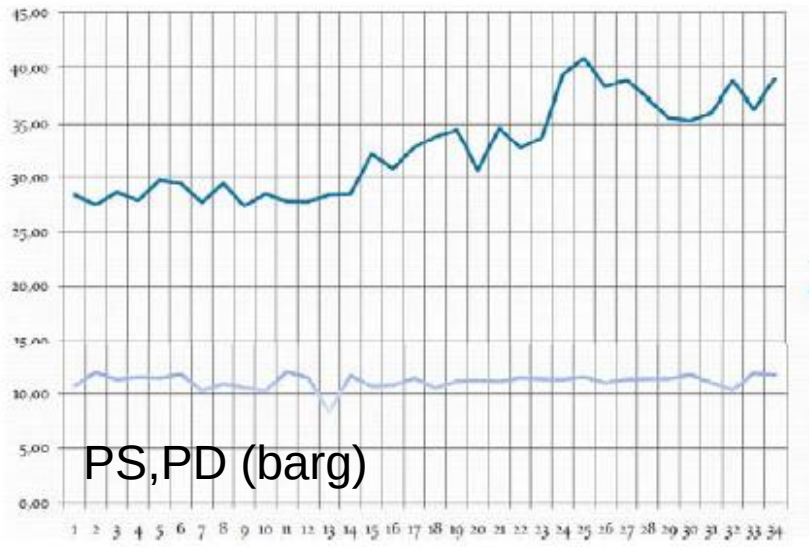

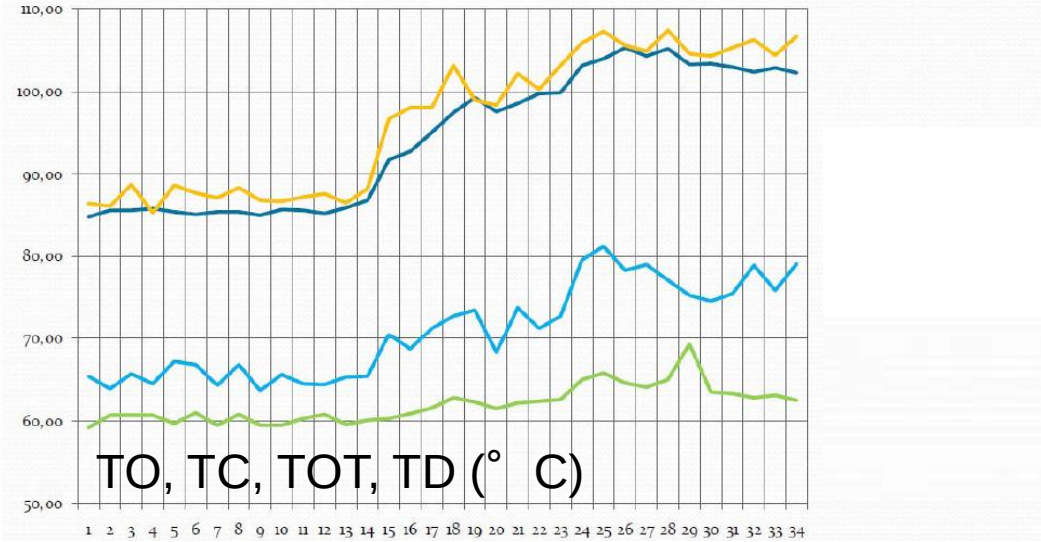

EFFICIENCY ANALYSIS

Difference planned & actual results if occured?	
If yes, why were there differences?	The plant produced approx. 10 GWh of energy in 2010, which increased to 13 GWh in 2011. The design COP-h is in the range of 3.7 to 5.2 depending on the plant load. The yearly overall COP-h was above 3 for the first 3 years of operation. Compared to classic boiler: saving of 72% input energy !
How is the process of measuring efficiency?	The equipment is operating following load programs which must be covered by the heating plant, which was fullfilled. The machines are equipped with frequency convertor for speed control at part-load operation in order to keep the best COP-h

HEAT SOURCE / HEAT OUTPUT / COP-heating overview

TE °C	TM °C	TC °C	RT kW	QTY	QC kW	BKWhp kW	HEAT SOURCE data center kW	HEAT SOURCE sewage water kW	extra compressor N200VL-L rt kW	extra compressor N200VL-L bkw kW	COP-final BKWt kW	COP-final cop-total QC/BKWt
4	40	80	2206	2	2732	526	600	1606	1360	246	772	3,5

CONCLUSION

NATURAL REFRIGERANTS SOLUTIONS FOR EUROPE :

THIS PROVEN FIELD EXAMPLE SHOWS THAT THE SUCCESS OF THE NEW TECHNOLOGY IS MUCH DEPENDING ON THE QUALITY OF THE PREPARATIONS DONE ON BEFOREHAND FOLLOWED BY THE INSTALLATION AND COMMISIONING WITH OPTIMAL FINE TUNING, FROM COOPERATION BETWEEN ALL PARTIES INVOLVED :

MANUFACTURER : MAYEKAWA JAPAN/ MAYEKAWA EUROPE
CONTRACTOR : THERMA INDUSTRI.

ATMO EU sphere
Solutions for Europe
natural refrigerants

THANKS FOR YOUR ATTENTION !

& much appreciated thanks to the Contractor of the fieldcases :

THERMA INDUSTRI AS
NORWAY
Mr.Stein Terje Brekke(stein.brekke@therma.no)
Mr.Stein Johnsen (stein.johnsen@therma.no)

MAYEKAWA
MYCOM

WORLDWIDE
- 35 countries / 122 offices
- 8 production plants

MAYEKAWA Europe Organization

SWITZERLAND
Rosenbergstrasse 31, 6300 Zug
Tel. +41 41 726 8628
Fax +41 41 726 8620
http://www.mayekawa.ch
E-mail info@mayekawa.ch

SPAIN
Calle Montevideo 5, Nave 13
Pol. Industrial Camporroso
28806 Alcala de Henares, Madrid
Tel. +34 91 830 0392
Fax +34 91 830 0397
http://www.mayekawa.es
E-mail mayekawa@mayekawa.es

GERMANY
Munich Office
Untere Bahnhofstrasse 38a, 82110 Germering
Tel. +49 89 5527 999 0
Fax +49 89 5527 999 19
Hamburg Office
Waldestraße 122a, 22083 Hamburg
Tel. +49 40 27899149 0
Fax +49 40 27899149 9
E-mail info@mayekawa.de

FRANCE
East Branch Office
9, Rue Michael Faraday
78180 Montigny-Le-Bretonneux
Tel. +33 1 30 58 28 00
Fax +33 1 30 58 19 37
West Branch Office
6, Square des Pruniers
22400 Lamballe
Tel. +33 2 96 76 59 13
Fax +33 1 30 58 19 37
E-mail mayekawa.france@mayekawa.eu

UNITED KINGDOM
16 Oakhurst Gardens
DA7 5JP Bexleyheath, Kent
Tel. +44 1322 433555
Fax +44 1322 433164

RUSSIA
House 3, Flat 54, Mytnaya St.
119049 Moscow
Tel. +7 499 230 01 76
Fax +7 499 230 21 12
http://www.mayekawa.ru
E-mail info@mayekawa.ru

BULGARIA
Kamen Andreev Str. 24, 1303 Sofia
Tel. +359 2 8910130
Fax +359 2 8910131

DUBAI
P.O.Box 61349, LOB. 11. No.126
Jabel Zone, Dubai, U.A.E
Tel. +971 4 887 2232
Fax +971 4 887 2238

INDIA
Mayekawa India PVT. LTD.
309, Centrum Plaza, Golf Course Road
Sector-53, Gurgaon
Haryana
Tel. +91 124 4208811 16
Fax +91 124 4208818

AUSTRALIA
Unit 2,44 McCauley Street
NSW 2036 Matraville
Tel. +61 2 9695 7000
Fax +61 2 9695 7001
http://www.mayekawa.com.au
E-mail mycomaus@mayekawa.com.au

NEW ZEALAND
Unit 2, 30 Tui Street Otahuhu
Auckland
Tel. +68 9 276 2305
Fax +68 9 276 2308
E-mail info@mayekawa.co.nz

ITALY
Via Riccardo Lombardi 19/12
20153 Milano
Tel. +39 2 48929218
Fax +39 2 4531728

TURKEY
Dunya Ticaret Merkezi
A/2 Blok Kat:10 No:325 Yesilkoy Istanbul
Tel. +90 212 465 36 31 34
Fax +90 212 465 36 35

JAPAN HEAD OFFICE
3-14-15 Botan Koto-ku
Tokyo 135 8482, JAPAN
Tel. 81 3 3642 6161
Fax 81 3 3643 7094
E-mail e-public@mayekawa.co.jp

MAYEKAWA Europe n.v/sa
Leuvensesteenweg 605
1930 Zaventem - Belgium
Tel.+32 2 757 00 75
Fax +32 2 757 00 23
http://www.mayekawa.eu
E-mail info@mayekawa.eu

Global web site
http://www.mayekawa.com/